


Small Permanent Magnets

Flat Gripper Magnets Fe - Co - Nd

Flat gripper magnets with galvanized case, with threaded bush.

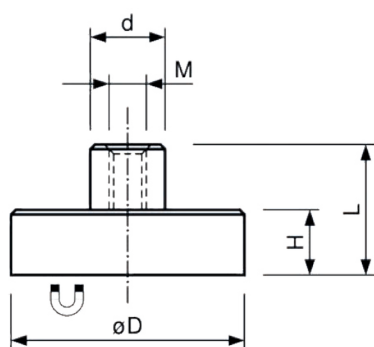

500 Fe



500 Co



500 Nd

Applications

- ☑ 500 Fe:
Material Ferrit;
max. admissible temperature 200°C
- ☑ 500 Co:
Material cobalt-samarium;
max. admissible temperature 200°C
- ☑ 500 Nd:
Material Neodymium;
max. admissible temperature 80°C;

Technical data

	Dimensions [mm]				Thread	Adhesive force [N]	Weight [g]	Item no.	Price [€]
	D	H	L	d					
500 Fe	10	4.5	11.5	6	M3	4	3	249	1,33
	13	4.5	11.5	6	M3	10	4	250	1,45
	16	4.5	11.5	6	M3	18	6	251	1,55
	20	6.0	13.0	6	M3	30	11	252	1,65
	25	7.0	15.0	8	M4	40	20	253	1,78
	32	7.0	15.0	8	M4	80	32	254	1,95
500 Co	40	8.0	18.0	10	M5	125	60	255	2,55
	50	10.0	22.0	12	M6	220	110	256	3,30
	63	14.0	30.0	15	M8	350	240	257	5,70
	80	18.0	34.0	20	M10	600	500	258	8,90
	100	22.0	43.0	22	M12	900	940	259	22,50
	125	26.0	50.0	25	M14	1300	1700	260	65,00
	6	4.5	11.5	6	M3	5	2	26199	2,45
	8	4.5	11.5	6	M3	11	3	26200	2,66
	10	4.5	11.5	6	M3	20	4	26201	2,89
	13	4.5	11.5	6	M3	40	6	26202	4,60
500 Nd	16	4.5	11.5	6	M4	60	7	26203	5,50
	20	6.0	13.0	8	M4	90	16	26204	6,50
	25	7.0	14.0	8	M4	150	28	26205	7,90
	32	7.0	15.5	10	M5	220	47	26206	12,50
	6	4.5	11.5	6	M3	5	2	26183	1,65
	8	4.5	11.5	6	M3	13	3	26184	1,85
	10	4.5	11.5	6	M3	25	4	26185	2,02
	13	4.5	11.5	6	M3	60	5	26186	2,16
	16	4.5	11.5	6	M4	95	7	26187	2,58
	20	6.0	13.0	8	M4	140	16	26188	4,04
25	7.0	14.0	8	M4	200	27	26189	6,34	
32	7.0	15.5	10	M5	350	45	26190	8,79	

Prices are subject to change