




assfalg

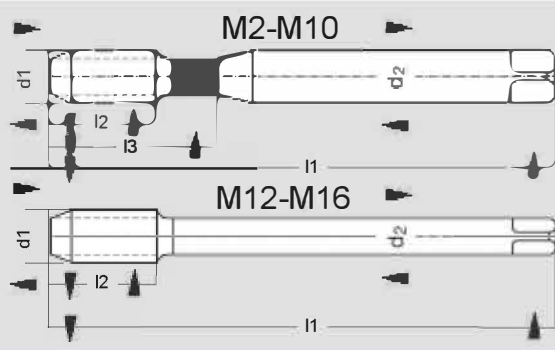

uncoated TIN coated TiCN coated

Internal thread shaper
type VA for rust-free materials
and steels with high strength

d1	l1	l2	l3	d2	z	Art. Nr.	Preis €	Art. Nr.	Preis €	Art. Nr.	Preis €	Core hole [Ø - mm]
without oil groove, DIN 2174												
M 3	56	11	18	3,5	4	600300	14,50	602300	20,00	603300	20,50	2,8
M 4	63	13	21	4,5	4	600302	20,50	602302	26,00	603302	26,50	3,7
M 5	70	16	25	6	4	600303	23,50	602303	29,00	603303	29,50	4,65
M 6	80	19	30	6	4	600304	24,75	602304	30,00	603304	30,50	5,55
M 8	90	22	35	8	6	600306	27,50	602306	34,00	603306	34,50	7,4
M 10	100	24	39	10	8	600308	32,50	602308	41,00	603308	42,00	9,3
M 12	110	28	-	9	8	600310	46,50	602310	57,00	603310	58,00	11,2
M 14	110	30	-	11	8	600311	57,00	602311	70,00	603311	71,00	13,1
M 16	110	32	-	12	8	600312	78,00	602312	92,00	603312	93,00	15,1
with oil groove, DIN 2174												
M 3	56	11	18	3,5	4	600280	15,25	602280	20,75	603280	21,50	2,8
M 4	63	13	21	4,5	4	600282	21,50	602282	27,00	603282	28,00	3,7
M 5	70	16	25	6	4	600283	24,75	602283	30,00	603283	30,50	4,65
M 6	80	19	30	6	4	600284	26,00	602284	31,50	603284	32,00	5,5
M 8	90	22	35	8	6	600286	28,50	602286	35,00	603286	36,00	7,4
M 10	100	24	39	10	8	600288	34,00	602288	43,00	603288	44,00	9,3
M 12	110	28	-	9	8	600290	48,50	602290	59,00	603290	60,00	11,2
M 14	110	30	-	11	8	600291	60,00	602291	73,00	603291	74,00	13,1
M 16	110	32	-	12	8	600292	82,00	602292	96,00	603292	97,00	15,1

assfalg



Steel



Superalloy



Stainless Steels



Cast Iron



Aluminium



Hardened Steels

Open questions?

Our experts help you:

Tel.: +49 (0) 7171 - 92505- 28 / 23

info@assfalg-metal.com